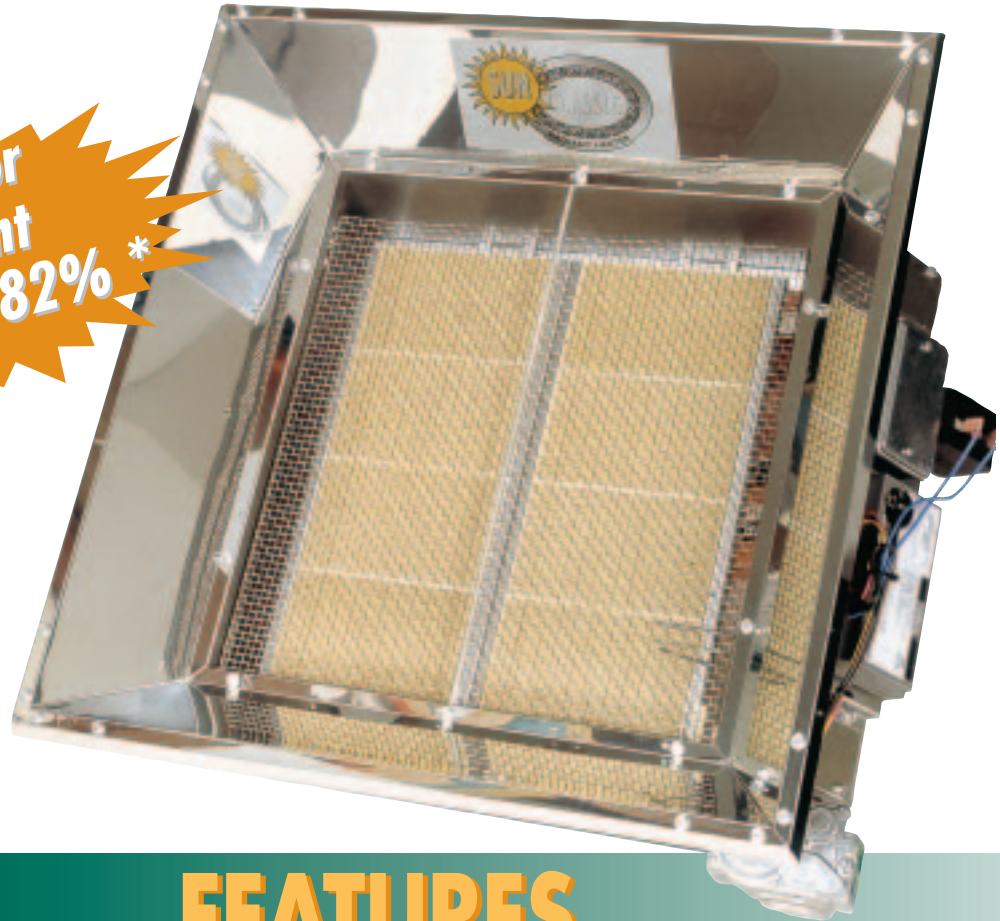


CLASSIC SERIES S HIGH INTENSITY Gas Fired Infrared Heaters



Superior
Radiant
Efficiency 82% *



FEATURES

Directed, COST-EFFECTIVE HEAT for COLD SPOTS.

- Low profile requires less space
- Entire construction is non-corrosive aluminized steel
- Unique pattern high output ceramics
- Performance enhancing screens on all models
- Modular head construction
- Reliable direct spark or millivolt ignition
- Reflector of high-polished aluminum maximizes radiant efficiency
- Rigid heavy duty construction — top of the industry
- 10 year limited warranty on complete heater head
- Natural Gas or Propane





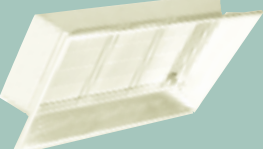
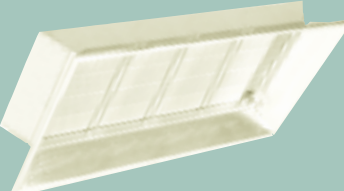
"STATE-OF-THE-ART" TECHNOLOGY

* Independently Tested



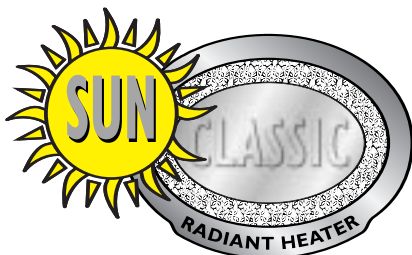
SPECIFICATIONS

SERIES S – HIGH INTENSITY INFRARED HEATERS

Heater	Part No.	BTU/HR		Radiating Surface (Sq. In.)	Dimensions			Shipping Weight (lbs.)
		Natural Gas	LPG		Height	Length	Width	
	SD03N*	33,000	–	90	9.2"	16.3"	24.4"	36
	SD03P*	–	30,000					
	SD06N*	66,000	–	180	9.2"	23.1"	24.4"	44
	SD06P*	–	60,000					
	SD09N*	99,000	–	270	9.2"	30.0"	24.4"	56
	SD09P*	–	90,000					
	SD12N*	132,000	–	360	9.2"	36.9"	24.4"	64
	SD12P*	–	120,000					
	SD16N*	160,000	–					

*Substitute "M" for "D" for Millivolt

General Specifications		Inlet Pressure			Accessories
Power Supply	24v or 115v (115/24 transformer throughout)	–	Natural Gas	Propane	<ul style="list-style-type: none"> • Line Volt Thermostat #CE014 • Low Volt Thermostat Celsius #CE051 • Low Volt Thermostat Fahrenheit #CE017 • Gas Flex Connector S/S 1/2" x 24" #CG012 • Gas Flex Connector I-Rubber 1/2" x 30" #CG052 • Gas Shut Off Valve 1/2" #CG011 • Chain Kit #SR010
Control	Direct Spark or Millivolt Ignition	Minimum	6.5" WC	11" WC	
Gas Supply	1/2" NPT	Maximum	1/2 psig.	1/2 psig.	



SUPERIOR RADIANT PRODUCTS LTD.
428 Millen Rd., Stoney Creek, ON L8E 3N9

Phone: (905) 664-8274
Toll Free: 1-800-527-HEAT (4328)
Fax: (905) 664-8846
Website: www.superiorradiant.com
Email: sales@superiorradiant.com

DISTRIBUTOR