


SERIES LA and LX INFRARED HEATERS

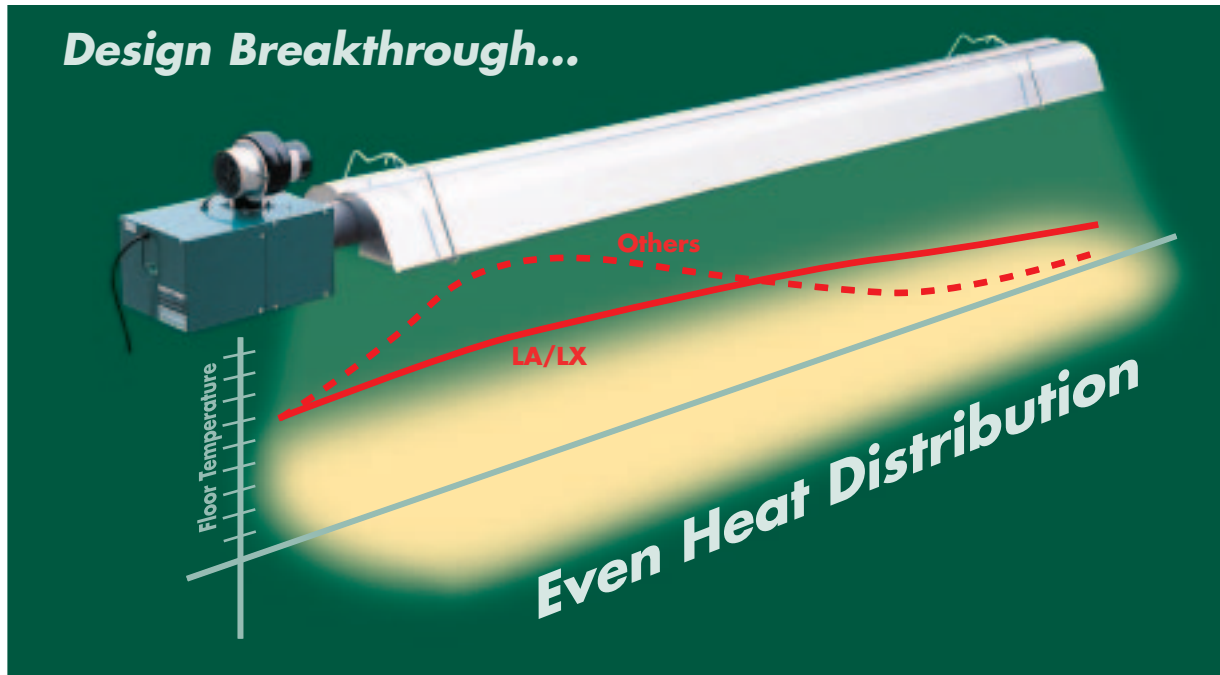

FEATURES

Sizes: 40,000 BTUH, 30 or 40 feet long
60,000 BTUH, 30, 40 or 50 feet long
80,000 BTUH, 40, 50 or 60 feet long
100,000 BTUH, 50 feet long

End to end radiant output variance less than 15%

- Natural Gas or LPG
- Configurations: U, L, horizontal, or 45°
- Separated controls compartment
- Self diagnostic ignition module, direct spark
- 100% Efficient parabolic aluminum reflector
- Vented or unvented
- Anti-corrosion construction available
- Ideal for - animal confinement applications
- low ceilings, hallways
- Jet Stream Burner
- Heavy duty couplings - no leaks
- Operating status light
- LX burner housing is totally enclosed
- 24v direct wire for thermostat



SUPERIOR TECHNOLOGY • SUPERIOR PERFORMANCE

